



# RMX SERIES - SINGLE ZONE MODULAR TEMPERATURE CONTROLLER WITH TOUCHSCREEN DISPLAY.

Athena's new Series RMX Modular Hot Runner controller is a microprocessor-based, single-zone temperature controller specifically designed for runnerless molding applications. The controller is fully self-tuning, with built-in diagnostics, and features an easy-to-use LCD operator touchscreen display for simultaneous process and set point displays and indicators for heat output, alarm, °F / °C, manual/closed loop mode, and CompuStep®.

Athena's Series RMX feature full PID control, making them suitable for precise temperature control of both manifolds and/or mold tips.

## KEY FEATURES

- CompuStep® bakeout feature removes moisture from the heater before full power is applied
- CompuCycle® feature improves response time, reduces thermal fatigue and prolongs heater life by applying AC power smoothly and continuously
- SafeChange™ "hot swap" feature allows safe removal and replacement of modules
- Compatible with all D-M-E Company's G Series and Smart Series, ITC, Yudo, and Incoe Brand mainframes.
- Accepts Type "J" or "K" thermocouple input (menu selectable) and features thermocouple protection.
- Current monitoring feature displays average output current to load
- Bumpless auto/manual transfer (menu selectable)
- Built-in loop break, open, and reverse thermocouple protection
- Adjustable alarms at 30°F (17°C)
- Built-in triac safety protection
- Ground fault protection
- Auto-tuning with adjustable proportional band and rate
- Modbus communications as standard




RMX Modular Controller for single zone temperature control from touchscreen.



- RMX controllers have master/slave capabilities and "All Command" set-up
- Stand-by function for input
- General output alarm

## ORDERING INFORMATION

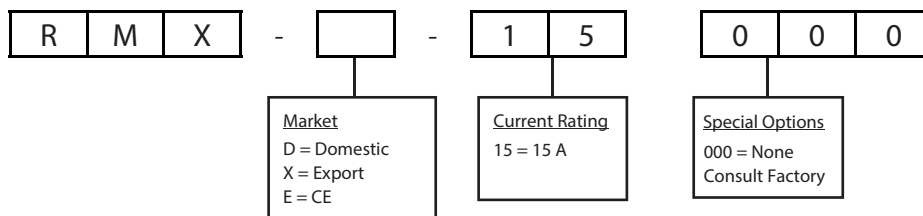

# Technical Specifications For RMX Series

## PERFORMANCE SPECIFICATIONS

Auto Control Mode	CompuCycle® system
Control Accuracy	±0.1°F (±0.1°C) dependent on the total thermal system
Ambient Temperature	32°F to 130°F (0°C to 55°C)
Temperature Stability	±0.5% of full scale over the ambient range of 32°F to 130°F (0°C to 55°C)
Calibration Accuracy	Better than 0.2% of full scale
Power Response Time	Better than 200 ms
Process Sampling	100 ms (nominal)
CompuStep® System Control Mode	Variable stepping voltage, phase angle fired
CompuStep® System Duration	Approximately 5 min
CompuStep® System Output Percent	Steps approximately 4% of input voltage
CompuStep® System Override Temperature	200°F (93°C)
Error Mode Response	a. T/C open, T/C reverse, T/C shorted and Loop Break overrides Auto mode/CompuStep® b. Manual mode overrides T/C open, T/C reverse

## INPUT SPECIFICATIONS

Thermocouple (T/C) Sensor	Type "J" or "K" grounded or ungrounded (menu selectable)
External T/C Resistance	Max. 100 ohms for accuracy
T/C Isolation	Isolated from ground and supply voltages
Cold Junction Compensation	Automatic, better than 0.02°F/°F (0.01°C/°C)
Input Type	Potentiometric
Input Impedance	350 kohms
Input Protection	Fuses, diode clamp, RC filter
Input Amplifier Stability	Better than 0.05 °F/°F (0.03°C/°C)
Input Dynamic Range	Greater than 999°F (537°C)
Common Mode Rejection Ratio	Greater than 100 dB
Power Supply Rejection Ratio	Greater than 70 dB

## OUTPUT SPECIFICATIONS

Voltages	240 Vac nominal, single phase 120 Vac available
Power Capability	15 amperes, 3600 watts @ 240 Vac
Overload Protection	Triac and load use fast-blow fuses. Both control legs are fused (ABC) Optional: High Speed Fuse (GBB)
Power Line Isolation	Optically and transformer isolated from ac lines. Isolation voltage is greater than 2500 volts.
Output Drive	Internal solid state triac, triggered by ac zero crossing pulses
Ground Fault Interupt (GFI)	Trips at 55 mA of leakage current

## CONTROLS AND INDICATORS

Set Point Control	Two buttons up or down on touchscreen
Range	0 to 999°F (535°C)
Resolution	1°F (1°C)
Display - Color LCD	Top: 3-digit Bottom: 3-digit
Status Indications on LCD	Heat Output Alarm °F/°C Mode: Normal (closed loop) Manual (open loop) Standby Boost SoftStart Idle
Power On-Off	Rocker Switch, UL, CSA, and VDE approved

## ELECTRICAL POWER SPECIFICATIONS

Input Voltage	240 Vac +10% -15% (204 - 265 Vac)
Frequency	50 Hz ± 3 Hz, 60 Hz ± 3 Hz
DC Power Supplies	Internally generated, regulated and temperature compensated
Module Power Usage	Less than 3 watts, excluding load

## TYPICAL SCREEN DISPLAYS



Athena Controls, Inc.  
5145 Campus Drive, Plymouth Meeting, PA 19462-1129 USA  
Toll Free: 1.800.782.6776; T: 1.610.828.2490  
F: 1.610.828.7084; Email: mktg@athenacontrols.com  
www.athenacontrols.com

CompuStep®, CompuCycle®, and Safechange™ are trademarks of Athena Controls, Inc.  
SMART SERIES® is a registered trademark of D.M.E. Co.  
YUDO® is a registered trademark of YudoCo, Ltd  
INCOE® is a registered trademark of Incoe Corporation